

Global Scan Microchip Scanner GS110


The Global-ident **Global Scan** reader is an easy to use unit that is capable of reading all ISO Microchips. Global Scan can communicate through serial port and store up to 800 RFID codes.



Global-ident connect microchip

Technical Specifications

- Reader memory has capacity for 800 transponders
- RS 232 serial link
- ISO 11784 and CE compliant
- Reading distances: FDX-B = 8 - 10cm, FDX-A = 5.5 - 6.5cm, HDX = 20 - 25cm
- Working temperatures: Store between -10°C to +60°C and use between 0°C to +50°C
- Dimensions: L15cm, W8cm, D3.5cm, Weight 140g
- Power: Standard 9V Alkaline or Lithium battery PP3

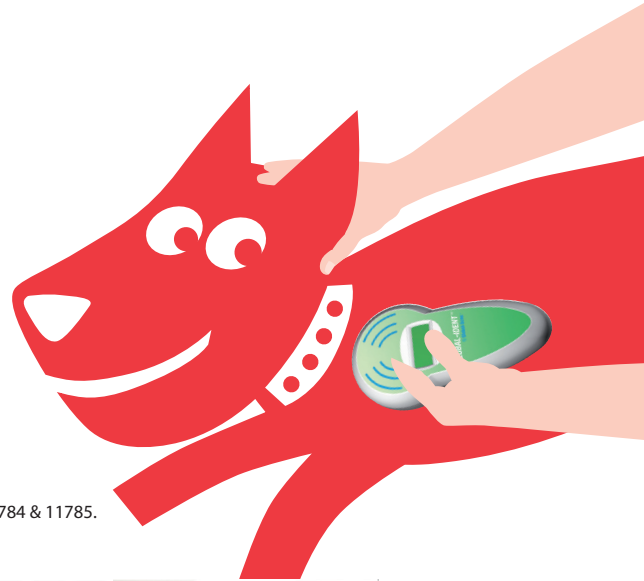

The Global-ident Global Scan reader and the FDX-B Transponder conform with the specification of ISO standards 11784 & 11785. The ISO standards ensure microchip system compatibility.



Two line on-screen display



Connect by RS232 cable



Simple single button operation. Additional button for Bluetooth connectivity*

* Bluetooth optional. Extra costs apply



Standard 9V Alkaline or Lithium battery is easily replaced



Storage capacity for 800 RFID codes



Ergonomic and compact reader is effective and practical



phone 1300 910 233



email sales@global-ident.com.au

www.global-ident.com.au



Keeping Companions Connected